

SMT Pneumatic Stencil Cleaning Machine

**Introduction:**

ETA-750 is a pneumatic stencil cleaning machine which used to clean SMT solder paste or red glue printing stencil. Famous pneumatic parts, strictly produce process, patented rotation spray rods guarantee you a high quality stencil cleaning machine. Both solvent and aqueous detergent can be use in ETA-750. Cleaning result is the same—100% clean.

Features:

1. SUS 304 structure, Acid and Alkali corrosion resistance, 10 years lifespan.
2. Only driven by compressed air, no use electric power at all.
3. One button easy operation, clean and dry complete automatically.
4. Patent 360° rotation spray rods on both sides, ensure good cleaning quality and stable stencil tension.
5. Liquid recycle use, low consumption.
6. Inner-lock safety door and safety valve, once open, machine will be stopped immediately.
7. 3-level precise liquid filtering system. Liquid used repeatedly.
8. Super well-known Pneumatic parts from all over the world manufactures.
9. Modular design, easy maintenance.

Material:

Diaphragm pump



Indicator light




Timer


USA—INGERSORAND

JAPAN--KOGANEI

Germany--HENNGSTLER

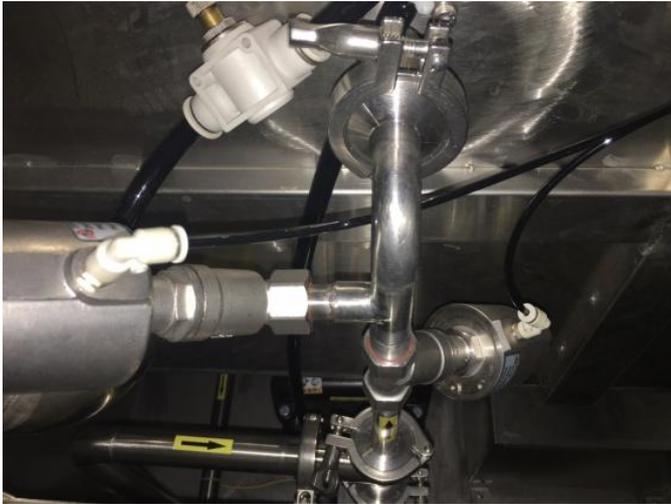


Pipe and valve
Stainless steel304


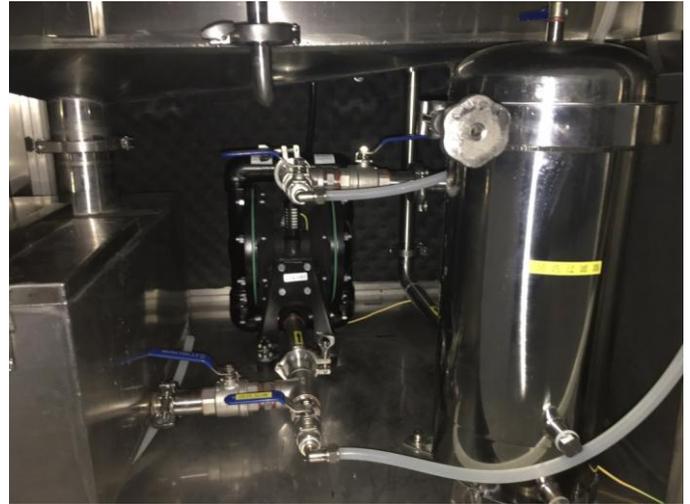


3 core large flow filter bucket
Stainless steel304

Effect:



vs



Before cleaning

After cleaning

Cleaning Report:

- 1.Customer:ON Semiconductor(Shenzhen) Co,Ltd
- 2.Inspection Tool: 200 times electronic magnifier

ON Semiconductor®

Test sample (pcb stencil,Water based cleaning agent CTS100)







3. Condition setting:

Machine	ETA-750
Cleaning liquid	CTS-100
Clean time	300s

Dry time	300s
Compressed air pressure	0.5Mpa
Cleaning fluid temperature	Normal temperature, no heating

4.Effect comparison:

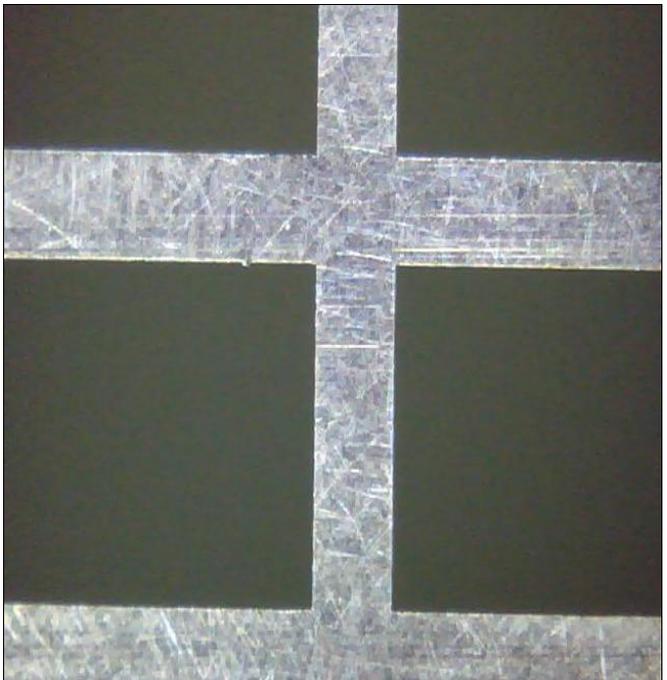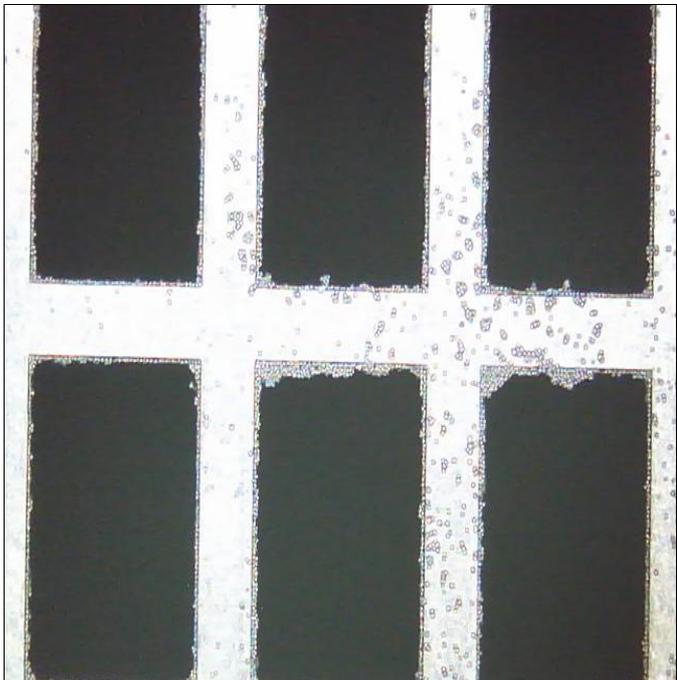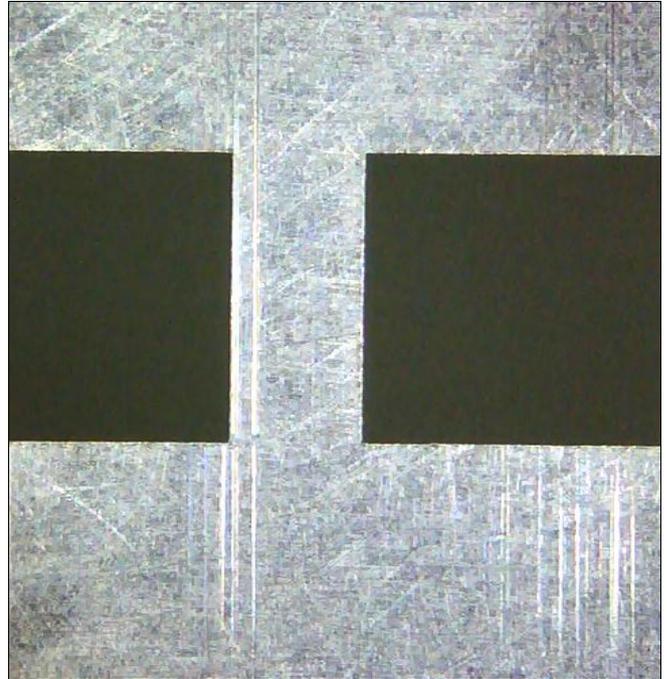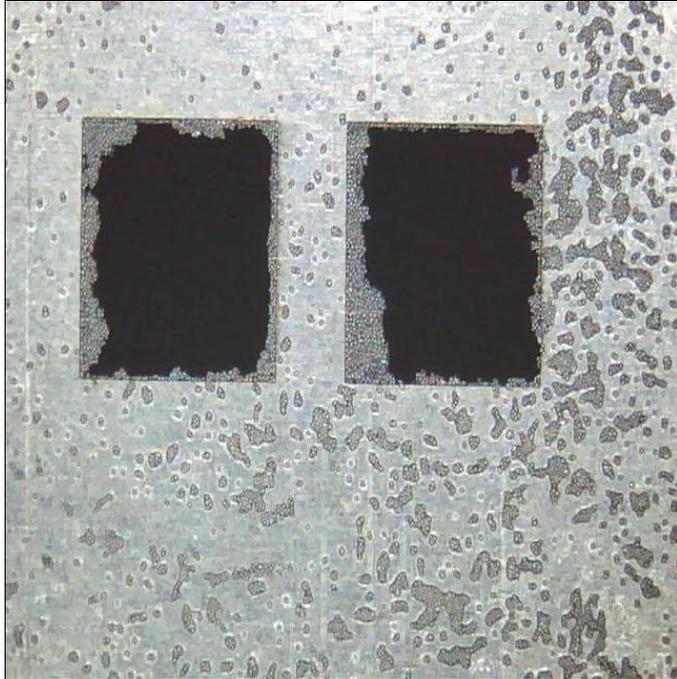

5. Conclusion

This cleaning test, CTS-100 water-based environmental protection cleaning fluid was used on ETA-750 cleaning machine. The air source was 0.5MPa, and the cleaning could be done by 300s. The remaining residues on the inner wall of the stencil opening and the stencil surface were completely cleaned.

In specific use, process parameters can be adjusted, such as cleaning time, drying time, spray pressure, etc., in order to better meet the actual production requirements.

Regular cleaning can solve the problem of solder paste residue on the stencil surface and mesh holes, and improve the printing quality and product yield.

Water based cleaning fluid, no volatilization, recycling, can save cleaning costs; no flash point, safe, environmental protection, in line with the requirements of fire protection and environmental protection. There is residual cleaning fluid, which can not be completely dried. It can be left standing for natural air drying.

The Cleaning will not damage the stencil.

Specification:

Item	ETA-750
Max stencil size	L750 x W750 x H40(mm)
Liquid tank	40L
Clean time	2~4min
Dry time	2~5min
Compressed air pressure	0.5~0.7Mpa
Air flow rate	400~600L/min
Clean method	360°rotation spray clean + compressed air blow dry
Filter system	20um/5um/1um, 3 level
Machine size	L800 x W950 x H1650(mm)
Machine weight	230KG

Customer:



Thanks for choosing ETA.

ETA looks forward to win-win cooperation.

Thank you.